
INOX Display „Crossed 42“

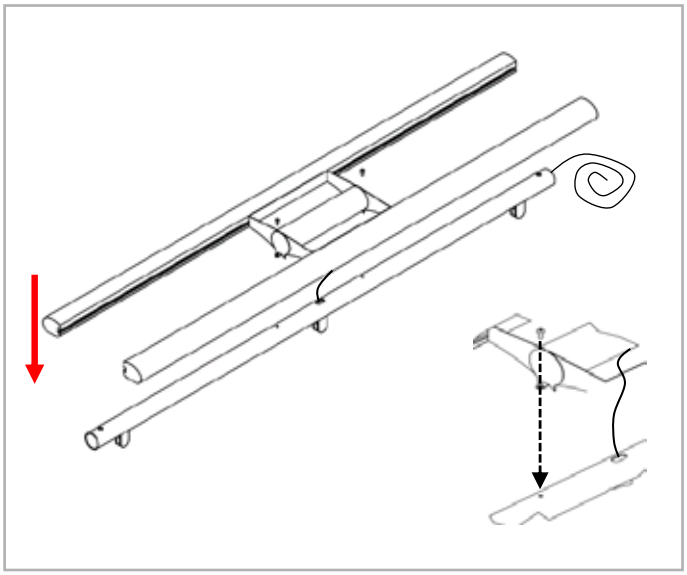


Scope of delivery:


- Mounting kit
- Assembly instruction
- Allen key size 2.5 *(for mounting panel holder)*
- Allen key size 3 *(for mounting of lighting)*
- Allen key size 4 *(for connection of tubes)*

1. Mounting the lighting:

- Pull the lighting supply cable (black) through the slotted hole in the upper cross-connection
- Pull the cable sideways out of the cross-connection
- Slowly move the lamp towards the tube, always feed the cable
- Screw on the lighting with the screws supplied (size 3 Allen key)

Do not bend or cut the cable when pulling it through!

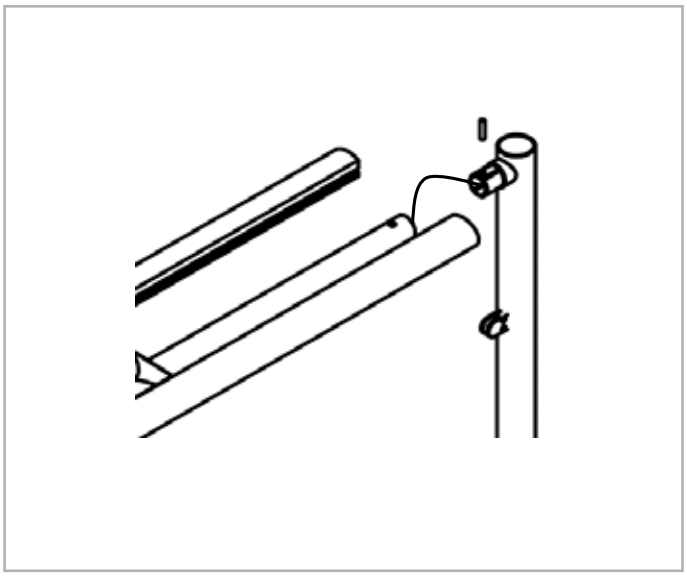

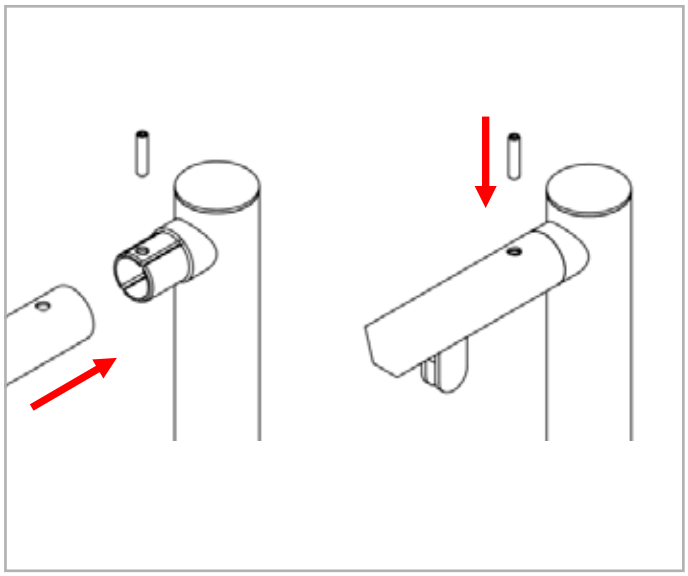


2. Assembly of the tubes

- Push the supply cable through the upper tubing connection of the upright
- Pull out the cable with pliers at the bottom long hole of the upright.
- Push the cross-connection completely onto the tubing connection and screw in and tighten the grub screw
- Make sure the holes are aligned
- Use the M8 x 35 mm grub screw and the size 4 Allen key for tightening

Tip: When pulling the cables through the tube connection, slightly pre-bend the cable so that it has a curve in the direction of the upright.

Do not bend or cut the cable when pulling it through!


INOX Display "Crossed 42"

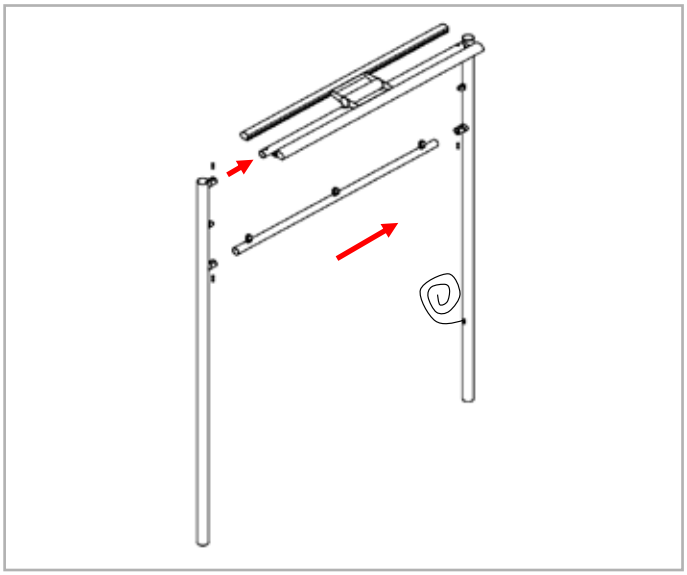

3. Assembly of the tubes:


- Slide the lower cross-connection onto the lower tube connection of the same upright and tighten.
- Push the second upright onto the cross-connections and tighten.
- Use the M8 x 35 mm grub screw and the size 4 Allen key to tighten.

Perform a function test of the lighting!

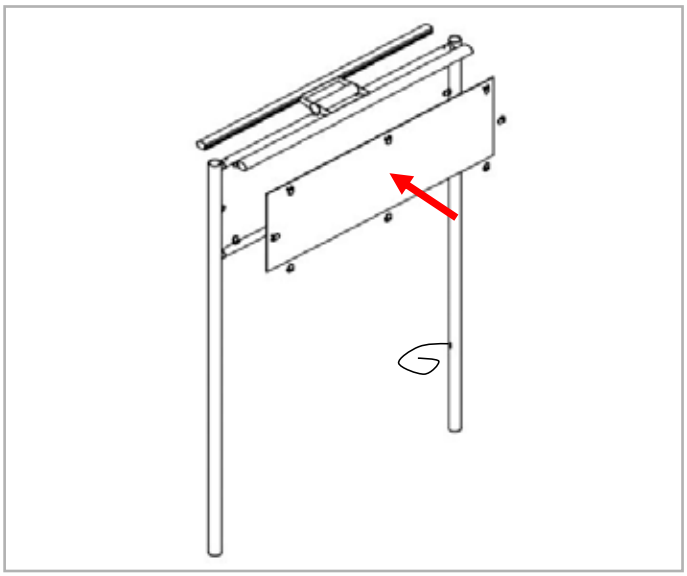

4. Inserting the panel:

- Loosen the countersunk screws M4 x 10 of the panel holders with an Allen key size 2.5
- Check if all rubber inserts are present
- Place the panel on the lower parts of the panel holders
- Put on the upper parts of the plate holders
- Screw the panel holders together

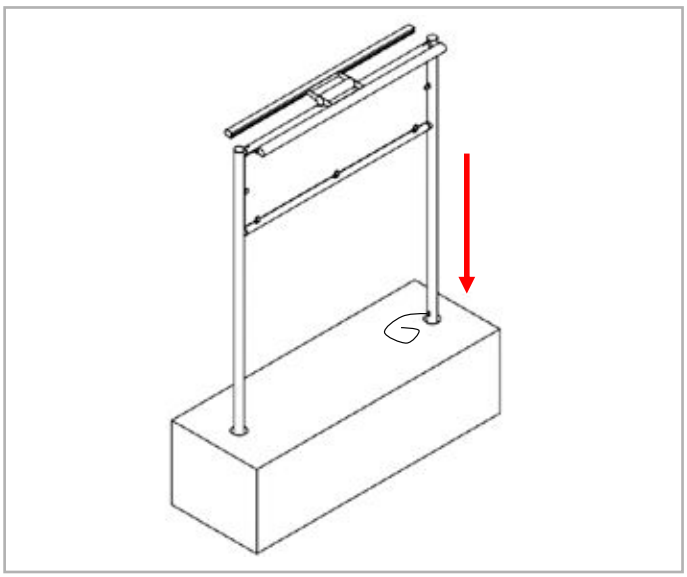

5. Setting up the display:

For the version to be set in concrete:

- Place the display in the holes of the foundation
- Fill the holes with grit or concrete
- Connecting the cable for the lighting

For version with flange plates:

- Insert concrete anchors with the hole size of the flange plates into the foundation
- Place the display on the concrete anchor
- Screw the display to the concrete anchors

The connection of the lighting must be done by an authorised electrician!