
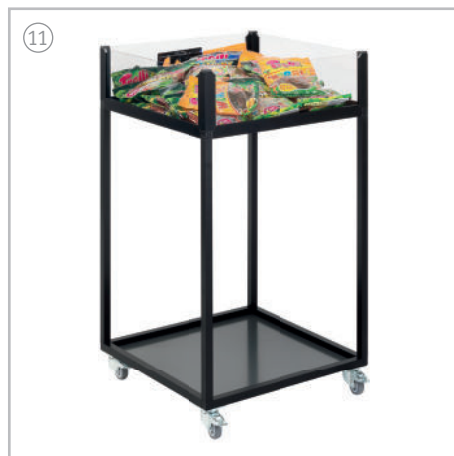
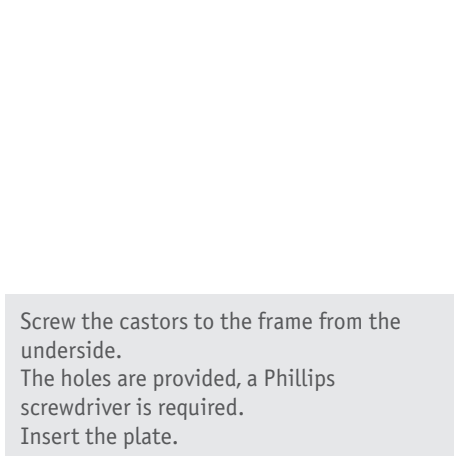


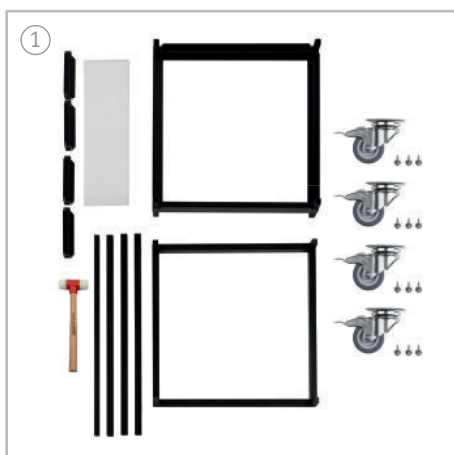

Screw the castors to the frame from the underside.
The holes are provided, a Phillips screwdriver is required.
Insert the plate.